

General Description

The GOTOP GGM-3325-MTR3WDC015 is a complete GPS engine module that features super sensitivity, ultra low power and small form factor. The GPS signal is applied to the antenna input of module, and a complete serial data message with position, velocity and time information is presented at the serial interface with NMEA protocol or custom protocol.

Its -165dBm tracking sensitivity extends positioning coverage into place like urban canyons and dense foliage environment where the GPS was not possible before. The small form factor and low power consumption make the module easy to integrate into portable device like PNDs, mobile phones, cameras and vehicle navigation systems.

Applications

- LBS (Location Based Service)
- PND (Portable Navigation Device)
- Vehicle navigation system
- Mobile phone



Figure 1:GGM-3325-MTR3WDC015 View

Features

- Build on high performance, low-power MT3337chipset
- Ultra high sensitivity: -165dBm
- Extremely fast TTFF at low signal level
- Built in high gain LNA
- Low power consumption: Max $20\text{mA}@3.3\text{V}$
- NMEA-0183 compliant protocol or custom protocol
- Operating voltage: 3.0V to 5.5V
- OD3.5 DC Connector:UART(3.0COMS)
- Operating temperature range: -40 to 85°C
- Patch Antenna Size: $18.4(\text{w})\text{mm}\times 18.4(\text{d})\text{mm}\times 4(\text{h})\text{mm}$
- Small form factor: $33\times 25\times 8.0\text{mm}$
- Line long: 150mm
- RoHS compliant (Lead-free)

Performance Specification

| Parameter | Specification |
|---------------------------|--|
| Receiver Type | L1 frequency band, 22tracking/66acquisition-channel |
| Sensitivity | Tracking -165dBm Acquisition -163dBm(hot) -148dBm(cold) |
| Accuracy | Position 5m CEP without SA Velocity 0.1m/s without SA Timing (PPS) 1mS RMS |
| Acquisition Time | Cold Start 38s Warm Start 35s Hot Start 1s Re-Acquisition <1s |
| Power Consumption | Tracking 20mA @3.3V Vcc Acquisition 20mA Sleep/Standby TBD |
| NavigationDataUpdate Rate | 1Hz |
| Operational Limits | Altitude Max 18,000m Velocity Max 515m/s Acceleration Less than 4g |

Interfaces Configuration

Power Supply: Regulated power for the GGM-3325-MTR3WDC015 is required. The input voltage Vcc should be 3.3V \pm 10%, maximum, current is no less than 20mA. Suitable decoupling must be provided by external decoupling circuitry.

UART Ports: The module supports two full duplex serial channels UART. All serial connections are at 3V CMOS logic levels, if need different voltage levels, use appropriate level shifters. The baud rate of both serial ports are fully programmable, the data format is however fixed: X, N, 8, 1, i.e. X baud rate, no parity, eight data bits and one stop bit, no other data formats are supported, LSB is sent first. The modules default baud rate is set up 9600bps, however, the user can change the default baud rate to any value from 4800 bps to 115kbps.

UART is used e.g. for booting and NMEA interface.

OD3.5 DC Connrctor

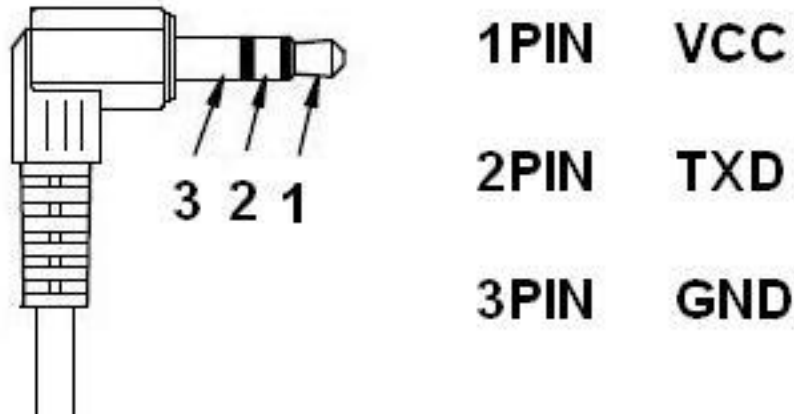


Figure 2: OD3.5 DC Connrctor TopView

Absolute Maximum Rating

| Parameter | Symbol | Min | Max | Units |
|-----------------------|--------|------|-----|-------|
| Power Supply | | | | |
| Power Supply Volt. | Vcc | 3.0 | 5.5 | V |
| Input Pins | | | | |
| Input Pin Voltage I/O | TXD | -0.3 | 3.6 | V |
| Environment | | | | |
| Storage Temperature | Tstg | -40 | 125 | °C |
| Humidity | | | 95 | % |

Note: Absolute maximum ratings are stress ratings only, and functional operation at the maxims is not guaranteed. Stress beyond the limits specified in this table may affect device reliability or cause permanent damage to the device. For functional operating conditions, refer

to the operating conditions tables as follow.

Operating Conditions

| Parameter | Symbol | Condition | Min | Typ | Max | Units |
|--------------------------|--------------------|-----------------------|---------------------|-----|----------------------|-------|
| Power supply voltage | V _{cc} | | 3.0 | 3.3 | 5.5 | V |
| Powersupplyvoltageripple | V _{cc_PP} | V _{cc} =3.3V | | | 40 | mV |
| Consumption current | I _{cc} | V _{cc} =3.3V | | 20 | 20 | mA |
| Input high voltage | V _{IH} | | 0.7xV _{cc} | | V _{cc} +1.0 | V |
| Input low voltage | V _{IL} | | -0.3 | | 0.3xV _{cc} | V |
| Output high voltage | V _{OH} | | 0.8xV _{cc} | | V _{cc} | V |
| Output low voltage | V _{OL} | | 0 | | 0.2xV _{cc} | V |
| Operating temperature | Topr | | -40 | | 85 | °C |

NMEA 0183 Protocol

The NMEA protocol is an ASCII-based protocol, Records start with a \$ and with carriage return/line feed. GPS specific messages all start with \$GPxxx where xxx is a three-letter identifier of the message data that follows. NMEA messages have a checksum, which allows detection of corrupted data transfers.

The Label Jet GGM-3325-MTR3WDC015 supports the following NMEA-0183 messages: GGA, GLL, GSA, GSV, RMC and VTG.

Table 1: NMEA-0183 Output Messages

| NMEA Record | DESCRIPTION |
|-------------|--|
| GGA | Global positioning system fixed data |
| GLL | Geographic position—latitude/longitude |
| GSA | GNSS DOP and active satellites |

| | |
|-----|--|
| GSV | GNSS satellites in view |
| RMC | Recommended minimum specific GNSS data |
| VTG | Course over ground and ground speed |

GGA-Global Positioning System Fixed Data

Table 2 contains the values of the following example:

\$GPGGA, 161229.487,3723.2475,N, 12158.3416,W, 1,07,1.0,9.0,M.0000*18

Table 2: GGA Data Format

| Name | Example | Units | Description |
|-----------------------|------------|--------|-----------------------------------|
| Message ID | \$GPGGA | | GGA protocol header |
| UTC Position | 161229.487 | | hhmmss.sss |
| Latitude | 3723.2457 | | ddmm.mmmm |
| N/S indicator | N | | N=north or S=south |
| Longitude | 12158.3416 | | dddmm.mmmm |
| E/W Indicator | W | | E=east or W=west |
| PositionFix Indicator | 1 | | See Table 2-1 |
| Satellites Used | 07 | | Range 0 to 66 |
| HDOP | 1.0 | | Horizontal Dilution of Precision |
| MSL Altitude | 9.0 | meters | |
| Units | M | meters | |
| Geoids Separation | | meters | |
| Units | M | meters | |
| Age of Diff.Corr. | | second | Null fields when DGPS is not Used |

| | | | |
|---------------------|------|--|----------------------------|
| Diff.Ref.Station ID | 0000 | | |
| Checksum | *18 | | |
| <CR> <LF> | | | End of message termination |

Table 2-1: Position Fix Indicators

| Value | Description |
|-------|---------------------------------------|
| 0 | Fix not available or invalid |
| 1 | GPS SPS Mode, fix valid |
| 2 | Differential GPS, SPS Mode, fix valid |
| 3 | GPS PPS Mode, fix valid |

GLL-Geographic Position – Latitude/Longitude

Table 3 contains the values of the following example:

\$GPGLL , 3723.2475, N,12158.3416, W,161229.487, A*2C.

Table 3: GLL Data Format

| Name | Example | Units | Description |
|---------------|------------|-------|----------------------------------|
| Message ID | \$GPGLL | | GLL protocol header |
| Latitude | 3723.2475 | | ddmm.mmmm |
| N/S Indicator | N | | N=north or S=south |
| Longitude | 12158.3416 | | dddmm.mmmm |
| E/W Indicator | W | | E=east or W=west |
| UTC Position | 161229.487 | | hhmmss.sss |
| Status | A | | A=data valid or V=data not valid |
| Checksum | *2C | | |
| <CR> <LF> | | | End of message termination |

GSA-GNSS DOP and Active Satellites

Table 4 contains the values of the following example:

\$GPGSA , A, 3, 07, 02, 26,27, 09, 04,15, , , , , , 1.8,1.0,1.5*33.

Table 4: GSA Data Format

| Name | Example | Units | Description |
|----------------|---------|-------|----------------------------------|
| Message | \$GPGSA | | GSA protocol header |
| Mode 1 | A | | See Table 4-2 |
| Mode 2 | 3 | | See Table 4-1 |
| Satellite Used | 07 | | Sv on Channel 1 |
| Satellite Used | 02 | | Sv on Channel 2 |
| ... | ... | | ... |
| Satellite Used | | | Sv on Channel 66 |
| PDOP | 1.8 | | Position Dilution of Precision |
| HDOP | 1.0 | | Horizontal Dilution of Precision |
| VDOP | 1.5 | | Vertical Dilution of Precision |
| Checksum | *33 | | |
| <CR> <LF> | | | End of message termination |

Table 4-1: Mode 1

| Value | Description |
|-------|-------------------|
| 1 | Fix not available |
| 2 | 2D |
| 3 | 3D |

Table 4-2: Mode 2

| Value | Description |
|-------|-------------|
|-------|-------------|

| | |
|---|---|
| M | Manual-forced to operate in 2D or 3D mode |
| A | Automatic-allowed to automatically switch 2D/3D |

GSV-GNSS Satellites in View

Table 5 contains the values of the following example:

\$GPGSV, 2, 1, 07, 07, 79,048, 42, 02, 51,062, 43, 26, 36,256, 42, 27, 27, 138,42*71

\$GPGSV, 2, 2, 07, 09, 23,313, 42, 04, 19, 159, 41, 15,12,041, 42*41.

Table 5: GGA Data Format

| Name | Example | Units | Description |
|--------------------|---------|---------|---------------------------------------|
| Message ID | \$GPGSV | | GSV protocol header |
| Number of Message | 2 | | Range 1 to 3 |
| Message Number | 1 | | Range 1 to 3 |
| Satellites in View | 07 | | |
| Satellite ID | 07 | | Channel 1(Range 1 to 32) |
| Elevation | 79 | degrees | Channel 1(Maximum 90) |
| Azinmuth | 048 | degrees | Channel 1(True, Range 0 to 359) |
| SNR(C/NO) | 42 | dBHz | Range 0 to 99,null when not tracking |
| ... | | | ... |
| Satellite ID | 27 | | Channel 4(Range 1 to 32) |
| Elevation | 27 | degrees | Channel 4(Maximum 90) |
| Azimuth | 138 | degrees | Channel 4(True, Range 0 to 359) |
| SNR(C/NO) | 42 | dBHz | Range 0 to 99, null when not tracking |
| Checksum | *71 | | |

| | | | |
|-----------|--|--|----------------------------|
| <CR> <LF> | | | End of message termination |
|-----------|--|--|----------------------------|

Depending on the number of satellites tracked multiple messages of GSV data may be required.

RMC-Recommended Minimum Specific GNSS Data

Table 6 contains the values of the following example:

\$GPRMC, 161229.487, A, 3723.2475, N, 12158.3416, W, 0.13,309.62, 120598,, *10

Table 6: RMC Data Format

| Name | Example | Units | Description |
|--------------------|------------|---------|----------------------------------|
| Message ID | \$GPRMC | | RMC protocol header |
| UTS Position | 161229.487 | | hhmmss.sss |
| Status | A | | A=data valid or V=data not valid |
| Latitude | 3723.2475 | | ddmm.mmmm |
| N/S Indicator | N | | N=north or S=south |
| Longitude | 12158.3416 | | dddmm.mmmm |
| E/W Indicator | W | | E=east or W=west |
| Speed Over Ground | 0.13 | Knots | |
| Course Over | 309.62 | Degrees | True |
| Ground | | | |
| Date | 120598 | | Dummy |
| Magnetic variation | | Degrees | E=east or W=west |
| Checksum | *10 | | |
| <CR> <LF> | | | End of message termination |

VTG-Course Over Ground and Ground Speed

Table 7 contains the values of the following example:

\$GPVTG, 309.62, T, M, 0.13, N, 0.2, K*6E

Table 7: VTG Data Format

| Name | Example | Units | Description |
|------------|---------|---------|----------------------------|
| Message ID | \$GPVTG | | VTG protocol header |
| Course | 309.62 | Degrees | Measured heading |
| Reference | T | | True |
| Course | | Degrees | Measured heading |
| Reference | M | | Magnetic |
| Speed | 0.13 | Knots | Measured horizontal speed |
| Units | N | | Knots |
| Speed | 0.2 | Km/hr | Measured horizontal speed |
| Units | K | | Kilometer per hour |
| Checksum | *6E | | |
| <CR> <LF> | | | End of message termination |

©Copyright 2013 Gotop Technology Co., Ltd. All Right Reserved

The information contained herein is subject to change without notice.

Gotop Technology Co. , LTD

Add:Room 603 Zhantao Technology Building,Minzhi Road,Xinniu Communnity,Minzhi Street,Baoan District,ShenZhen City China.

Phone: 86-755-23804156

fax: 86-755-23804155

N 22° 32' 17", E 114° 07' 07"

<http://www.gotop-zzu.com>

Not to be reproduced in whole or part for any purpose without written permission of Gotop Technology Inc ('Gotop'). Information provided by Gotop is believed to be accurate and reliable. These materials are provided by Gotop as a service to its customers and may be used for informational purposes only. Gotop assumes no responsibility for errors or omissions in these materials, nor for its use. Gotop reserves the right to change specification at any time without notice.

These materials are provides 'as is' without warranty of any kind, either expressed or implied, relating to sale and/or use of Gotop products including liability or warranties relating to fitness for a particular purpose, consequential or incidental damages, merchantability, or infringement of any patent, copyright or other intellectual property right. Gotop further does not warrant the accuracy or completeness of the information, text, graphics or other items contained within these materials. Gotop shall not be liable for any special, indirect, incidental, or consequential damages, including without limitation, lost revenues or lost profits, which may result from the use of these materials.

Gotop products are not intended for use in medical, life-support devices, or applications involving potential risk of death, personal injury, or severe property damage in case of failure of the product.