	<b>GOTOP GT-1513-MTR</b>
	<b>Ultra High Sensitivity and Low Power GPS Receiver Module</b>
<b>www.gotop-zzu.com</b>	

## General Description

The Gotop GT-1513-MTR is a complete GPS engine module that features super sensitivity, ultra low power and small form factor. The GPS signal is applied to the antenna input of module, and a complete serial data message with position, velocity and time information is presented at the serial interface with NMEA protocol or custom protocol.

Its  $-165\text{dBm}$  tracking sensitivity extends positioning coverage into place like urban canyons and dense foliage environment where the GPS was not possible before. The small form factor and low power consumption make the module easy to integrate into portable device like PNDs, mobile phones, cameras and vehicle navigation systems.

## Applications

- LBS (Location Based Service)
- PND (Portable Navigation Device)
- Vehicle navigation system
- Mobile phone



**Figure 1: GT-1513 -MTR Top View**

## Features

- Build on high performance, low-power MTK3337 chipset
- Ultra high sensitivity: -165dBm
- Extremely fast TTFB at low signal level
- Built in high gain LNA
- Low power consumption: Max 20mA@3.3V
- NMEA-0183 compliant protocol or custom protocol
- Operating voltage: 2.8V to 4.3V
- Operating temperature range: -40 to 85°C
- SMD type with stamp holes
- Small form factor: 15x13x2.4mm
- RoHS compliant (Lead-free)

## Pin Assignment

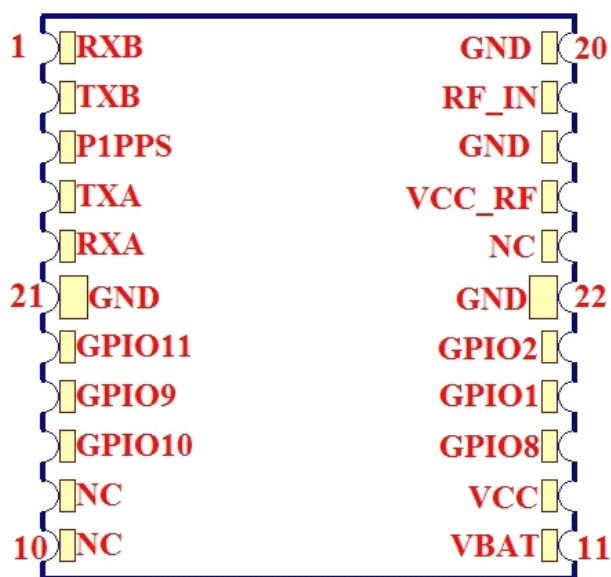


Figure 2: GT-1513-MTR Pin Package


## Performance Specification

Parameter	Specification	
Receiver Type	L1 frequency band, 22tracking/66acquisition-channel	
Sensitivity	Tracking	-165dBm
	Acquisition	-163dBm(hot)
		-148dBm(cold)
Accuracy	Position	5m CEP without SA
	Velocity	0.1m/s without SA
	Timing (PPS)	10ns RMS
Acquisition Time	Cold Start	38s
	Warm Start	35s
	Hot Start	1s
	Re-Acquisition	<1s
Power Consumption	Tracking	20mA @3.3V Vcc
	Acquisition	18mA
	Sleep/Standby	TBD
NavigationDataUpdate Rate	1Hz	
Operational Limits	Altitude	Max 18,000m
	Velocity	Max 515m/s
	Acceleration	Less than 4g

## Interfaces Configuration

**Power Supply:** Regulated power for the GT-1513-MTR is required. The input voltage  $V_{cc}$  should be  $3.3V \pm 10\%$ , maximum, current is no less than 20mA. Suitable decoupling must be provided by external decoupling circuitry.

**Antenna:** The GT-1513-MTR GPS receiver is designed for supporting the active antenna or passive antenna connected with pin RF\_IN. The gain of active antenna should be no less than 15dB. The maximum noise figure should be no more than 2.5dB and output impedance is at 50 Ohm.

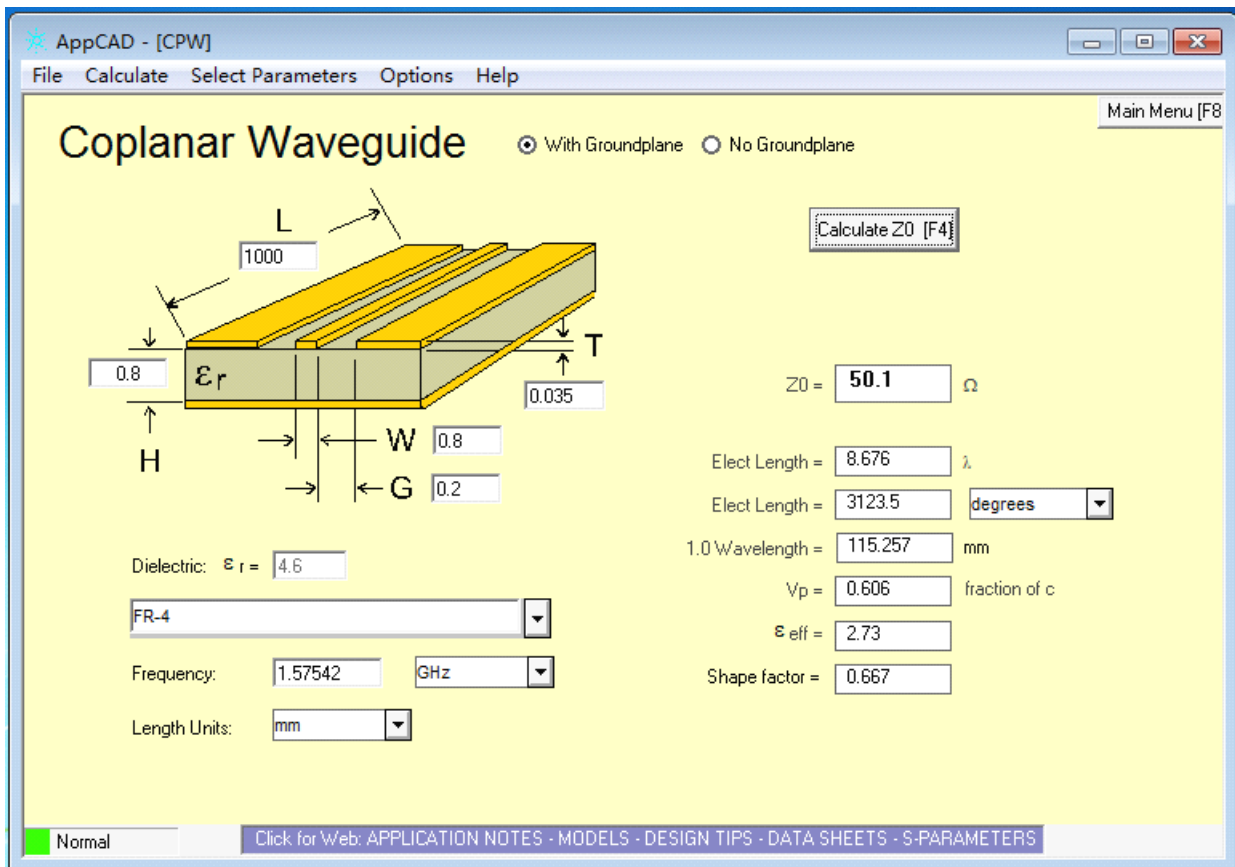

**UART Ports:** UART is thehas 3 full duplexserial ports. It is used for serial data communication. A UART converts bytes of data to and from asynchronous start-stop bit

streams represented as binary electrical impulses. There are several functions in GT-1513-MT related to UART communication, such as UART data transmission/receive and NMEA sentences input/output. In general, UART0 is as NMEA output and PMTK command input, UART1 as RTCM input. You can adjust the UART2 port as desired. The receiver (RXA) and transmitter (TXA) side of every port contains a 16-byte FIFO, but only UART0 has 256 bytes of URAM. The bit rates are selectable and range from 4.8 to 921.6 kbps. UART provides signal or message outputs.

**Backup Battery Power:** In case of a power failure on pin Vcc, real-time clock and backup RAM are supplied through pin VBAT. This enables the GT-1513-MTR GPS Receiver to recover from power failure with either a hot start or a warm start (depending on the duration of Vcc outage). If no Backup Battery is connected, the receiver performs a cold start upon powered up.

## Pin Description

Pin No.	Pin name	I/O	Description	Remark
1	RXB	I	2.8V, LVTTTL I/O PPU, PPD, SMT 2mA ~ 16mA PDR, Serial input for UART 2, Default: 75K pull-up Default: 8mA driving	
2	TXB	O	2.8V, LVTTTL I/O PPU, PPD, SMT 2mA ~ 16mA PDR, Serial input for UART 2, Default: 75K pull-up Default: 8mA driving	
3	P1PPS	O	Time Pulse(1PPS)	Leave Open in not used
4	TXA	O	2.8V, LVTTTL I/O PPU, PPD, SMT 2mA ~ 16mA PDR, Serial input for UART 1, Default: 75K pull-up Default: 8mA driving	

5	RXA	I	2.8V, LVTTTL I/O PPU, PPD, SMT2mA ~ 16mA PDR, Serial input for UART 1, Default: 75K pull-up Default: 8mA driving
6	GPIO11	I/O	2.8V, LVTTTL I/O PPU, PPD, SMT2mA ~ 16mA PDR JTAG interface clock Default: 75K pull-down Default: 8mA driving
7	GPIO9	I/O	Strap pin host_sel[0] Host_sel[1:0] Interface
8	GPIO10	I/O	Strap pin host_sel[0] Host_sel[1:0] Interface
9	NC		No connection
10	NC		No connection
11	V_BAT	P	Backup battery supply voltage
12	VCC	P	DC supply voltage
13	GPIO8	I/O	2.8V, LVTTTL I/O PPU, PPD, SMT2mA ~ 16mA PDR JTAG interface clock Default: 75K pull-down Default: 8mA driving
14	GPIO1	I/O	2.8V, LVTTTL I/O PPU, PPD, SMT2mA ~ 16mA PDR JTAG interface clock Default: 75K pull-down Default: 8mA driving
15	GPIO2	I/O	2.8V, LVTTTL I/O PPU, PPD, SMT2mA ~ 16mA PDR JTAG interface clock Default: 75K pull-down Default: 8mA driving
16	NC		No connection
17	VCC_RF	P	Linear regulator power output, 3.0V (Do not use this as power source of backup battery)
18	GND	G	Ground
19	RF_IN	I	GPS Signal Input
20	GND	G	Ground
21	GND	G	Ground
22	GND	G	Ground

## Electrical Characteristics

### Absolute Maximum Rating

Parameter	Symbol	Min	Max	Units
<b>Power Supply</b>				
Power Supply Volt.	Vcc	2.8	4.3	V
<b>Input Pins</b>				
Input Pin Voltage I/O	UART	-0.3	3.6	V
Backup Battery	VBAT	2.0	3.6	V
<b>Environment</b>				
Storage Temperature	Tstg	-40	125	°C
PeakReflow Soldering Temperature	Tpeak		260	°C
Humidity			95	%


Note: Absolute maximum ratings are stress ratings only, and functional operation at the maxims is not guaranteed. Stress beyond the limits specified in this table may affect device reliability or cause permanent damage to the device. For functional operating conditions, refer to the operating conditions tables as follow.

### Operating Conditions

Parameter	Symbol	Condition	Min	Typ	Max	Units
Power supply voltage	Vcc		2.8	3.3	4.3	V

<b>Powersupplyvoltage</b> <b>ripple</b>	V <sub>CC_PP</sub>	V <sub>CC</sub> =3.0V			30	mV
Consumption current	I <sub>CC</sub>	V <sub>CC</sub> =3.0V		20	18	mA
Input high voltage	V <sub>IH</sub>		0.7xV <sub>CC</sub>		V <sub>CC</sub> +1.0	V
Input low voltage	V <sub>IL</sub>		-0.3		0.3xV <sub>CC</sub>	V
Output high voltage	V <sub>OH</sub>		0.8xV <sub>CC</sub>		V <sub>CC</sub>	V
Output low voltage	V <sub>OL</sub>		0		0.2xV <sub>CC</sub>	V
Operating temperature	T <sub>opr</sub>		-40		85	°C

**Mechanical Specification**

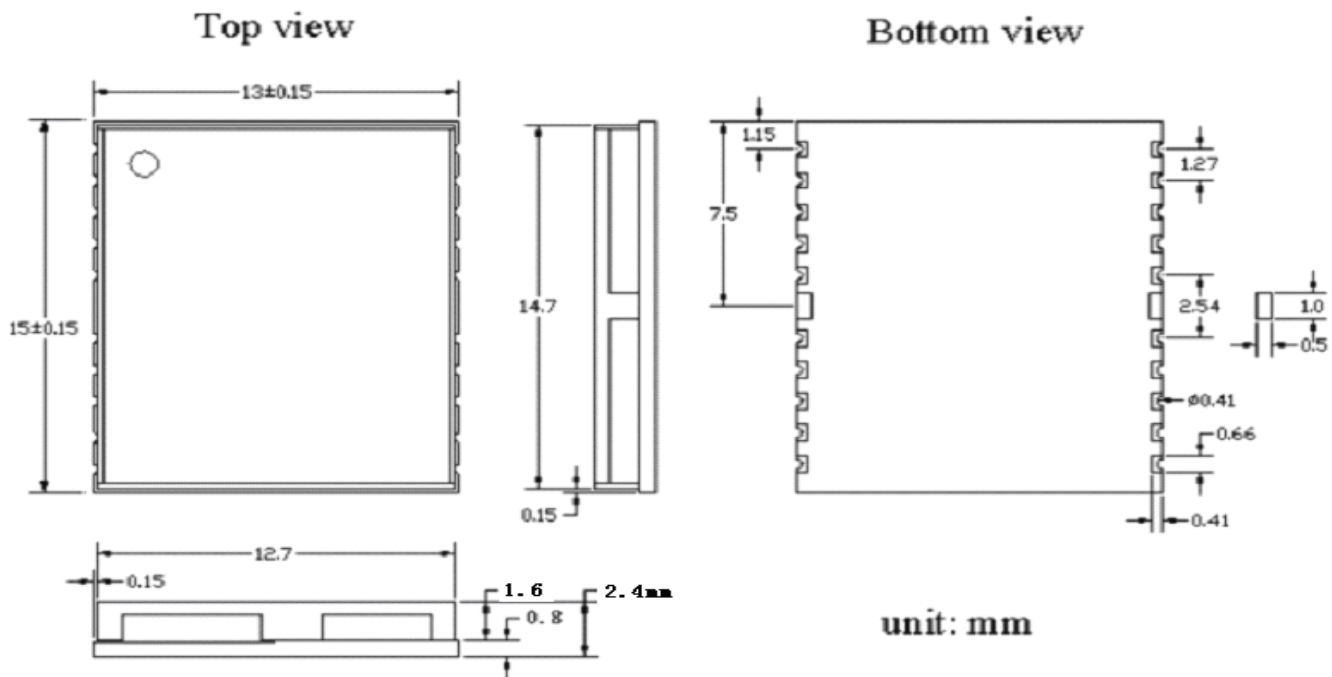

**Figure 3: GT-1513-MTR Dimensions**

**Software Protocol**

**NMEA 0183 Protocol**



The NMEA protocol is an ASCII-based protocol, Records start with a \$ and with carriage return/line feed. GPS specific messages all start with \$GPxxx where xxx is a three-letter identifier of the message data that follows. NMEA messages have a checksum, which allows detection of corrupted data transfers.

The Gotop GT-1513-MTR supports the following NMEA-0183 messages: GGA, GLL, GSA, GSV, RMC and VTG

Table 1: NMEA-0183 Output Messages

<b>NMEA Record</b>	<b>DESCRIPTION</b>
GGA	Global positioning system fixed data
GLL	Geographic position—latitude/longitude
GSA	GNSS DOP and active satellites
GSV	GNSS satellites in view
RMC	Recommended minimum specific GNSS data
VTG	Course over ground and ground speed

**GGA-Global Positioning System Fixed Data**

Table 2 contains the values of the following example:

\$GPGGA, 161229.487,3723.2475,N, 12158.3416,W, 1,07,1.0,9.0,M.0000\*18

Table 2: GGA Data Format

<b>Name</b>	<b>Example</b>	<b>Units</b>	<b>Description</b>
Message ID	\$GPGGA		GGA protocol header

UTC Position	161229.487		hhmmss.sss
Latitude	3723.2457		ddmm.mmmm
N/S indicator	N		N=north or S=south
Longitude	12158.3416		dddmm.mmmm
E/W Indicator	W		E=east or W=west
PositionFixIndicator	1		See Table 2-1
Satellites Used	07		Range 0 to 12
HDOP	1.0		Horizontal Dilution of Precision
MSL Altitude	9.0	meters	
Units	M	meters	
Geoids Separation		meters	
Units	M	meters	
Age of Diff.Corr.		second	Null fields when DGPS is not Used
Diff.Ref.Station ID	0000		
Checksum	*18		
<CR> <LF>			End of message termination

Table 2-1: Position Fix Indicators

Value	Description
0	Fix not available or invalid

1	GPS SPS Mode, fix valid
2	Differential GPS, SPS Mode, fix valid
3	GPS PPS Mode, fix valid

### GLL-Geographic Position – Latitude/Longitude

Table 3 contains the values of the following example:

\$GPGLL , 3723.2475, N,12158.3416, W,161229.487, A\*2C.

Table 3: GLL Data Format

Name	Example	Units	Description
Message ID	\$GPGLL		GLL protocol header
Latitude	3723.2475		ddmm.mmmm
N/S Indicator	N		N=north or S=south
Longitude	12158.3416		dddmm.mmmm
E/W Indicator	W		E=east or W=west
UTC Position	161229.487		hhmmss.sss
Status	A		A=data valid or V=data not valid
Checksum	*2C		

<CR> <LF>			End of message termination
-----------	--	--	----------------------------

**GSA-GNSS DOP and Active Satellites**

Table 4 contains the values of the following example:

\$GPGSA , A, 3, 07, 02, 26,27, 09, 04,15, , , , , , 1.8,1.0,1.5\*33.

Table 4: GSA Data Format

Name	Example	Units	Description
Message	\$GPGSA		GSA protocol header
Mode 1	A		See Table 4-2
Mode 2	3		See Table 4-1
Satellite Used	07		Sv on Channel 1
Satellite Used	02		Sv on Channel 2
...	...		...
Satellite Used			Sv on Channel 12
PDOP	1.8		Position Dilution of Precision
HDOP	1.0		Horizontal Dilution of Precision
VDOP	1.5		Vertical Dilution of Precision
Checksum	*33		
<CR> <LF>			End of message termination

Table 4-1: Mode 1

Value	Description
1	Fix not available
2	2D
3	3D

Table 4-2: Mode 2

Value	Description
M	Manual-forced to operate in 2D or 3D mode
A	Automatic-allowed to automatically switch 2D/3D

### GSV-GNSS Satellites in View

Table 5 contains the values of the following example:

\$GPGSV , 2, 1, 07, 07, 79,048, 42, 02, 51,062, 43, 26, 36,256, 42, 27, 27, 138,42\*71

\$GPGSV, 2, 2, 07, 09, 23,313, 42, 04, 19, 159, 41, 15,12,041, 42\*41.

Table 5: GGA Data Format

Name	Example	Units	Description
Message ID	\$GPGSV		GSV protocol header
Number of Message	2		Range 1 to 3
Message Number	1		Range 1 to 3
Satellites in View	07		
Satellite ID	07		Channel 1(Range 1 to 32)

Elevation	79	degrees	Channel 1(Maximum 90)
Azinmuth	048	degrees	Channel 1(True, Range 0 to 359)
SNR(C/NO)	42	dBHz	Range 0 to 99,null when not tracking
...			...
Satellite ID	27		Channel 4(Range 1 to 32)
Elevation	27	degrees	Channel 4(Maximum 90)
Azimuth	138	degrees	Channel 4(True, Range 0 to 359)
SNR(C/NO)	42	dBHz	Range 0 to 99, null when not tracking
Checksum	*71		
<CR> <LF>			End of message termination

Depending on the number of satellites tracked multiple messages of GSV data may be required.

**RMC-Recommended Minimum Specific GNSS Data**

Table 6 contains the values of the following example:

\$GPRMC, 161229.487, A, 3723.2475, N, 12158.3416, W, 0.13,309.62, 120598,, \*10

Table 6: RMC Data Format

<b>Name</b>	<b>Example</b>	<b>Units</b>	<b>Description</b>
Message ID	\$GPRMC		RMC protocol header
UTS Position	161229.487		hhmmss.sss

Status	A		A=data valid or V=data not valid
Latitude	3723.2475		ddmm.mmmm
N/S Indicator	N		N=north or S=south
Longitude	12158.3416		dddmm.mmmm
E/W Indicator	W		E=east or W=west
Speed Over Ground	0.13	Knots	
Course Over	309.62	Degrees	True
Ground			
Date	120598		dummy
Magnetic variation		Degrees	E=east or W=west
Checksum	*10		
<CR> <LF>			End of message termination

### VTG-Course Over Ground and Ground Speed

Table 7 contains the values of the following example:


\$GPVTG, 309.62, T, M, 0.13, N, 0.2, K\*6E

Table 7: VTG Data Format

Name	Example	Units	Description
Message ID	\$GPVTG		VTG protocol header
Course	309.62	Degrees	Measured heading

Reference	T		True
Course		Degrees	Measured heading
Reference	M		Magnetic
Speed	0.13	Knots	Measured horizontal speed
Units	N		Knots
Speed	0.2	Km/hr	Measured horizontal speed
Units	K		Kilometer per hour
Checksum	*6E		
<CR> <LF>			End of message termination

### Manufacturing Process Recommendations

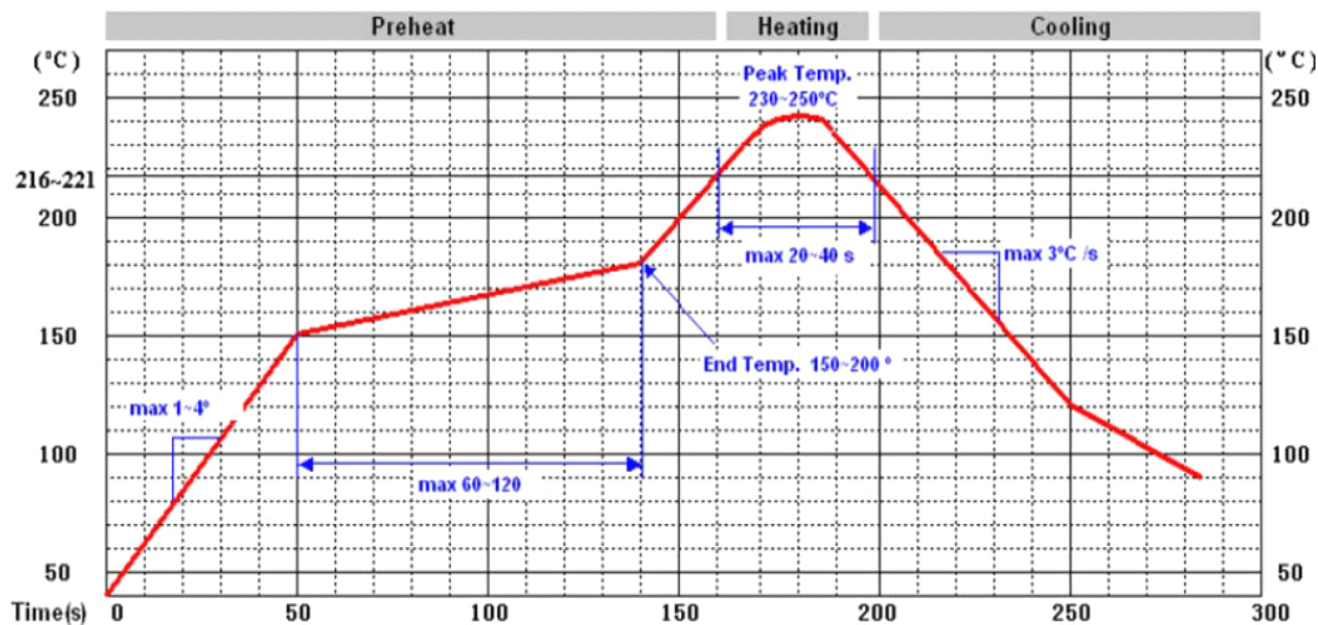

**Note :** The final soldering temperature chosen at the factory depends on additional external factors like choice of soldering paste, size, thickness and properties of the baseboard, etc. Exceeding the maximum soldering temperature in the recommended soldering profile may permanently damage the module.



©Copyright 2012 Gotop Technology Co., Ltd. All Right Reserved

**The information contained herein is subject to change without notice.**

## **Gotop Technology Co. , LTD**

Add:Room 603 Zhantao Technology Building,Minzhi Road,Xinniu Communnity,Minzhi Street,Baoan District,ShenZhen City China.

Phone: 86-755-23804156

fax: 86-755-23804155

N 22° 32' 17", E 114° 07' 07"

<http://www.gotop-zzu.com>

Not to be reproduced in whole or part for any purpose without written permission of Gotop Technology Inc ('Gotop'). Information provided by Gotop is believed to be accurate and reliable. These materials are provided by Gotop as a service to its customers and may be used for informational purposes only. Gotop assumes no responsibility for errors or omissions in these materials, nor for its use. Gotop reserves the right to change specification at any time without notice.

These materials are provides 'as is' without warranty of any kind, either expressed or implied, relating to sale and/or use of Gotop products including liability or warranties relating to fitness for a particular purpose, consequential or incidental damages, merchantability, or infringement of any patent, copyright or other intellectual property right. Gotop further does not warrant the accuracy or completeness of the information, text, graphics or other items contained within these materials. Gotop shall not be liable for any special, indirect, incidental, or consequential damages, including without limitation, lost revenues or lost profits, which may result from the use of these materials. Gotop products are not intended for use in medical, life-support devices, or applications involving potential risk of death, personal injury, or severe property damage in case of failure of the product.