

GOTOP	GOTOP GT-2217-UB
	Ultra High Sensitivity and Low Power GPS Receiver Module
www.gotop-zzu.com	

General Description

The GT-2217-UB module series is a family of stand-alone GPS receivers featuring the high performance u-blox 6 positioning engine. These flexible and cost effective receivers offer numerous connectivity options in a miniature 22.4 x 17 x 2.4mm package. Their compact architecture and power and memory options make GT-2217-UB modules ideal for battery operated mobile devices with very strict cost and space constraints.

The 50-channel u-blox 6 positioning engine boasts a Time-To-First-Fix (TTFF) of under 1 second. The dedicated acquisition engine, with over 1 million correlators, is capable of massive parallel time/frequency space searches, enabling it to find satellites instantly. Innovative design and technology suppresses jamming sources and mitigates multipath effects, giving GT-2217-UB GPS receivers excellent navigation performance even in the most challenging environments.

GT-2217-UB modules are not designed for life saving or supporting devices or for aviation and should not be used in products that could in any way negatively impact the security or health of the user or third parties or that could cause damage to goods.

Applications

- LBS (Location Based Service)
- PND (Portable Navigation Device)
- Vehicle navigation system
- Mobile phone



Figure 1: GT-2217 -UB Top View

Features

- Build on high performance, low-power u-blox6xxx chipset
- Ultra high sensitivity: -160dBm
- Extremely fast TTFF at low signal level
- Built in high gain LNA
- Low power consumption: Max 40mA@3.0V
- NMEA-0183 compliant protocol or custom protocol
- Operating voltage: 2.75V to 3.6V
- Operating temperature range: -40 to 85°C
- SMD type with stamp holes
- Small form factor: 22.4x17x2.4mm
- RoHS compliant (Lead-free)

Pin Assignment

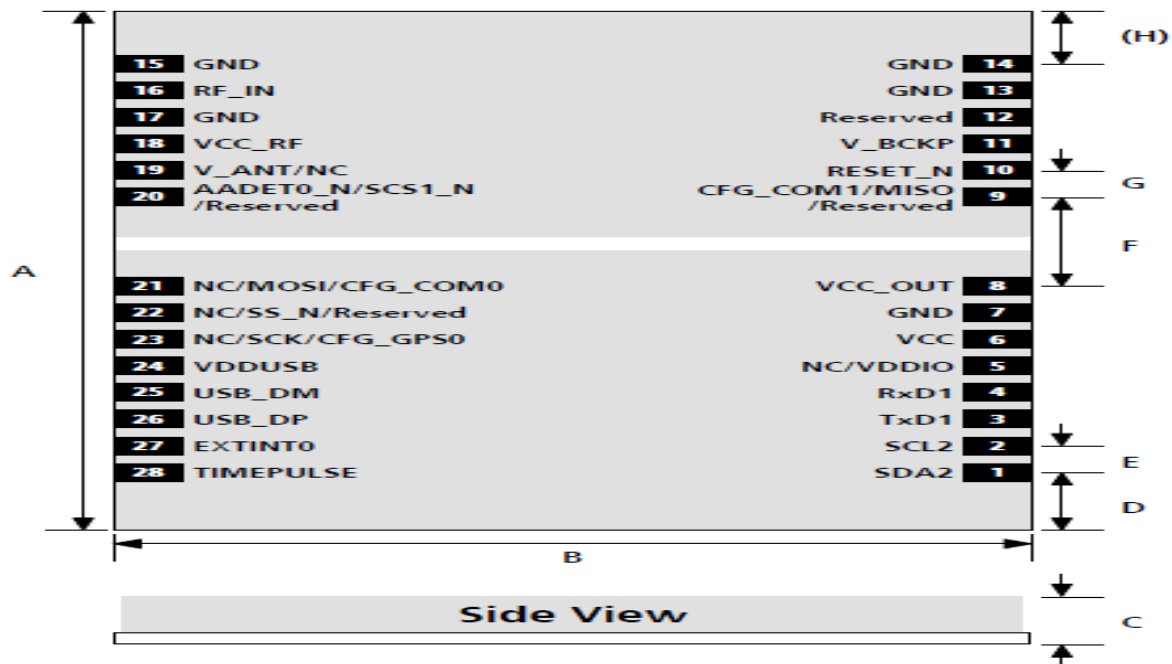


Figure 2: GT-2217-UB Pin Packag

Mechanical Specifications

Parameter	Specification	
A	22.4 +0.6/-0.1mm	[882 +24/-4mil]
B	17.0 ±0.1mm	[669 ±4mil]
C	3.0 /2.4 ±0.3mm	[118 /97 ±12mil]
D	2.55 +0.3/-0.1mm	[100 +18/-4mil]
E	1.1 ±0.1mm	[43 ±4mil]
F	3.80 ±0.1mm	[150 ±4mil]
G	1.10 ±0.1mm	[75 ±4mil]
H	2.85 +0.3/-0.01mm	[112 +18/-4mil]
Weight	2.1 g	

Performance Specification

Parameter	Specification	
Receiver Type	L1 frequency band, C/A code, 50-channels SBAS: WAAS, EGNOS, MSAS, GAGAN	
Sensitivity	Tracking -160dBm Acquisition -160dBm	
Accuracy	Position 5m CEP without SA Velocity 0.1m/s without SA Timing (PPS) 10ns RMS	
Acquisition Time	Cold Start 29s Warm Start 28s Hot Start 1s Re-Acquisition <1s	

Power Consumption	Tracking	35mA @3V Vcc
	Acquisition	40mA
	Sleep/Standby	TBD
NavigationDataUpdate Rate	1Hz	
Operational Limits	Altitude	Max 18,000m
	Velocity	Max 515m/s
	Acceleration	Less than 4g

Interfaces Configuration

1.1 Assisted GPS (A-GPS)

Supply of aiding information like ephemeris, almanac, rough last position and time and satellite status and an optional time synchronization signal will reduce time to first fix significantly and improve the acquisition sensitivity. GT-2217-UB modules support the u-blox AssistNow Online and AssistNow Offline A-GPS services⁸ and are OMA SUPL compliant.

1.2 SuperSense Indoor GPS

GT-2217-UB modules come with SuperSense, providing ultra-fast acquisition/reacquisition and exceptional tracking sensitivity. SuperSense enables best-in-class tracking and navigation in difficult signal environments such as urban canyons or indoor locations.

1.3 KickStart / Oscillators

An available feature is KickStart. This functionality uses a TCXO to accelerate weak signal acquisition, enabling faster start and reacquisition times. KickStart is available with the GT-2217-UB.

1.4 Protocols and interfaces

Protocol	Type
NMEA	Input/output, ASCII, 0183, 2.3 (compatible to 3.0)
UBX	Input/output, binary, u-blox proprietary

Table 3: Available protocols

Both protocols are available on UART, USB, DDC and SPI. For specification of the various protocols see the u-blox_6 Receiver Description including Protocol Specification [2].

GT-2217-UB modules support a number of peripheral interfaces for serial communication. The embedded firmware uses these interfaces according to their respective protocol specifications. For specific applications, the firmware also supports the connection of peripheral devices, such as external memories, to some of the interfaces.

1.5 UART

GT-2217-UB modules include one configurable UART interface for serial communication (for information about configuration see section 1.11).

1.6 USB

GT-2217-UB modules provide a USB version 2.0 FS (Full Speed, 12Mbit/s) interface as an alternative to the UART. The pull-up resistor on USB_DP is integrated to signal a full-speed device to the host. The VDD_USB pin supplies the USB interface, independently from the VDD_IO pin.

u-blox provides a Microsoft® certified USB driver for Windows XP and Windows Vista operating systems. Windows 7 will also be supported following certification

. Operating System	Support level
Windows XP	Certified
Windows Vista	Certified
Windows 7	Certification pending

Table 4: Operating systems supported by USB driver

1.7 Serial Peripheral Interface (SPI)

An SPI interface is planned for future versions of GT-2217-UB modules. The SPI interface allows for the connection of external devices with a serial interface, e.g. EEPROM or A/D converters, or to interface to a host CPU. The interface can be operated in master or slave mode. In master mode, one chip select signal is available to select external slaves. In slave mode a single chip select signal enables communication with the host.

1.8 Display Data Channel (DDC)

The I2C compatible DDC interface can be used either to access external devices with a serial interface (e.g. EEPROM or A/D converters) or to interface with a host CPU. It is capable of master and slave operation and communicates at a rate of <100kbit/s. GPS.

1.9 Antenna

GT-2217-UB modules are designed for use with passive and active9 antennas.

Parameter		Specification
Antenna Type		Passive and active antenna
Active Antenna Recommendations	Minimum gain	15 - 20 dB (to compensate signal loss in RF cable)
	Maximum noise figure	1.5 dB
	Maximum gain	50 dB

The maximum noise figure should be no more than 1.5dB and output impedance is at 50 Ohm.

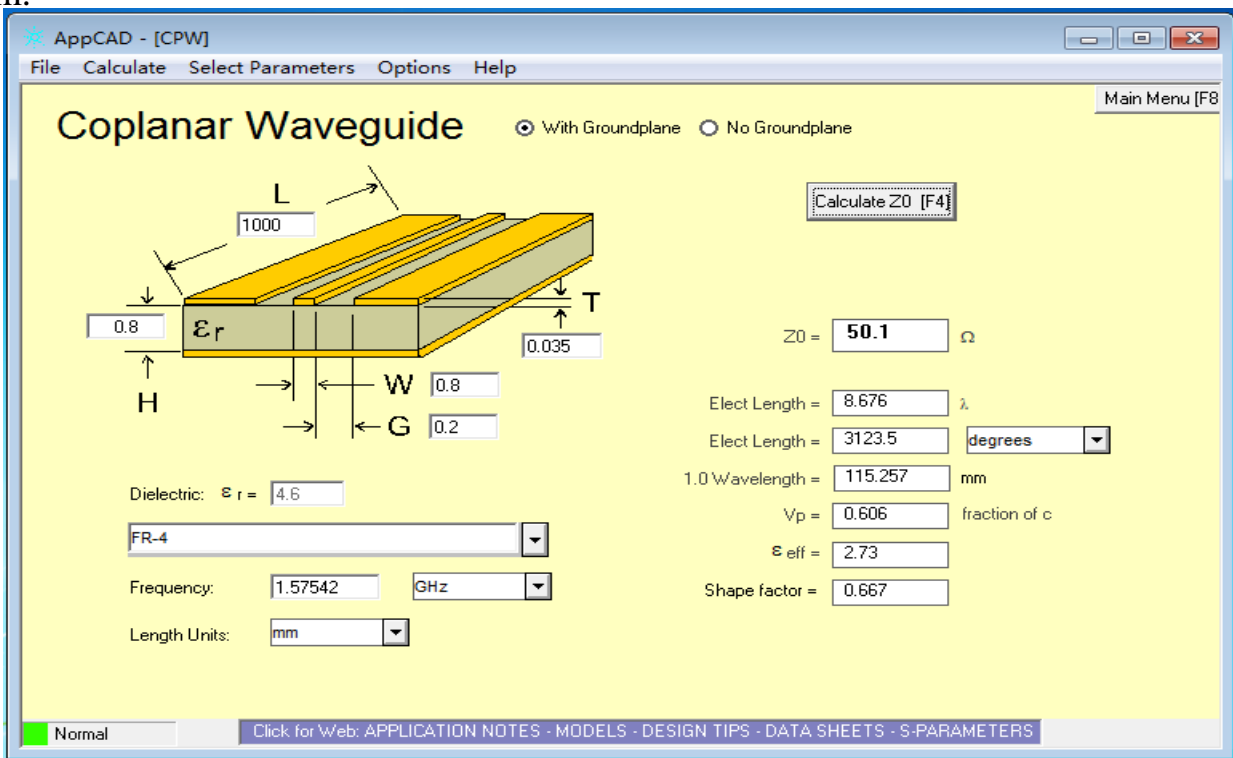


Table 5: Antenna Specifications for all GT-2217-UB modules

2.0 Operating modes

GT-2217-UB modules have 2 continuous operating modes (Maximum Performance and Eco). Maximum Performance mode freely uses the acquisition engine, resulting in the best possible TTFF, while Eco mode optimizes the use of the acquisition engine to deliver lower current consumption. At medium to strong signals, there is almost no difference for acquisition and tracking performance in these modes.

2.1 Maximum Performance mode

In Maximum Performance mode, u-blox 6 receivers use the acquisition engine at full performance to search for all possible satellites until the Almanac is completely downloaded.

As a consequence, tracking current consumption level will be achieved when:

- A valid GPS position is fixed
- Almanac is entirely downloaded
- Ephemeris for all satellites in view are valid

2.2 Eco mode

In Eco mode, u-blox 6 receivers use the acquisition engine to search for new satellites only when needed for navigation:

In cold starts, u-blox 6 searches for enough satellites to navigate and optimizes use of the acquisition engine to download their ephemeris.

In non-cold starts, u-blox 6 focuses on searching for visible satellites whose orbits are known from the Almanac.

In Eco mode, the u-blox 6 acquisition engine limits use of its searching resources to minimize power consumption. As a consequence the time to find some satellites at weakest signal level might be slightly increased in comparison to the Max. performance mode.

u-blox 6 deactivates the acquisition engine as soon as a position is fixed and a sufficient number (at least 4) of satellites are being tracked. The tracking engine continues to search and track new satellites without orbit information.

2.3 Boot-time configuration

GT-2217-UB modules provide configuration pins for boot-time configuration. These become effective immediately after start-up. Once the module has started, the configuration settings may be modified with UBX configuration messages. The modified settings remain effective until power-down or reset. If these settings have been

stored in battery-backup RAM, then the modified configuration will be retained, as long as the backup battery supply is not interrupted.

GT-2217-UB modules include a **CFG_COM0** pin, which can be configured as seen in Table 6. Default settings in bold.

CFG_COM0	Protocol	Messages	UARTBaud rate	USB Power
1	NMEA	GSV, RMC, GSA, GGA, GLL, VTG, TXT	9600	BUS Powered10
0	NMEA	GSV, RMC, GSA, GGA, GLL, VTG, TXT	38400	Self Powered

Table 6: Supported CFG_COM0 settings

GT-2217-UB include both **CFG_COM0** and **CFG_COM1** pins and can be configured as seen in Table 7. Default settings in bold.

CFG_COM1	CFG_COM0	Protocol	Messages	UARTBaud rate	USB power
1	1	NMEA	GSV, RMC, GSA, GGA, GLL, VTG, TXT	9600	BUS Powered
1	0	NMEA	GSV, RMC, GSA, GGA, GLL, VTG, TXT	38400	Self Powered
0	1	NMEA	GSV10, RMC, GSA, GGA, VTG, TXT	4800	BUS Powered
0	0	UBX	NAV-SOL, NAV-STATUS, NAV-SVINFO, NAV-CLOCK, INF, MON-EXCEPT	57600	BUS Powered

Table 7: Supported COM settings GT-2217-UB

The GT-2217-UB include a **CFG_GPS0** pin, which enables the boot-time configuration of the power mode. These settings are described in Table 8. Default settings in bold

. CFG_GPS0	Power Mode
0	Eco Mode
1	Maximum Performance Mode

Table 8: Supported CFG_GPS0 settings GT-2217-UB

External serial EEPROM

GT-2217-UBmodules allow an optional external serial EEPROM to be connected to the DDC interface.

This feature is only supported by modules with ROM 6.0 and above.

Pin Description

Pin No.	Pin name	I/O	Description
1	SDA2	I/O	DDC Data
2	SCL2	I/O	DDC Clock
3	TxD1	O	Serial Port 1
4	RxD1	I	Serial Port 1
5	NC		
6	VCC	I	Supply voltage
7	GND	I	Ground (digital)
8	VCC_OUT	O	Output voltage
9	MISO CFG_COM1	I	SPI MISOCOnfiguration Pin

10	RESET_N	I	
11	V_BCKP	I	Backup voltage supply
12	Reserved	I	
13	GND	G	Ground
14	GND	G	Ground
15	GND	G	Ground
16	RF_IN	I	GPS signal input
17	GND	G	Ground
18	VCC_RF	O	Output Voltage RF section
19	V_ANT	I	Antenna Bias voltage
20	SCS1_N	O	SPI Chip Select
21	MOSI_CFG_COM0	I/O	SPI MOSI Configuration Pin
22	SS_N	I	SPI Slave Select
23	SCK_CFG_GPS0	I	SPI Clock Power Mode Configuration Pin
24	VDDUSB	I	USB Supply
25	USB_DM	I/O	USB Data
26	USB_DP	I/O	USB Data
27	EXTINT0	I	External Interrupt Pin
28	TIMEPULSE	O	Time pulse (1PPS)

Electrical Characteristics

Absolute Maximum Rating

Parameter	Symbol	Min	Max	Units
Power Supply				
Power Supply Volt.	Vcc	2.75	3.6	V
Input Pins				
Input Pin Voltage I/O	Rxd1/Txd1	-0.3	3.6	V
Input Pin Voltage I/O	VDDUSB	-0.3	3.6	V
Backup Battery	V_BCKP	2.0	3.6	V
Environment				
Storage Temperature	Tstg	-40	125	°C
PeakReflow Soldering Temperature	Tpeak		260	°C
Humidity			95	%

Note: Absolute maximum ratings are stress ratings only, and functional operation at the maxims is not guaranteed. Stress beyond the limits specified in this table may affect device reliability or cause permanent damage to the device. For functional operating conditions, refer to the operating conditions tables as follow.

Operating Conditions

Parameter	Symbol	Condition	Min	Typ	Max	Units
-----------	--------	-----------	-----	-----	-----	-------

Power supply voltage	V _{CC}		2.75	3.3	3.6	V
Power supply voltage ripple	V _{CC_PP}	V _{CC} =3.0V			35	mV
Consumption current	I _{CC}	V _{CC} =3.0V		40	45	mA
Input high voltage	V _{IH}		0.7xV _{CC}		V _{CC} +1.0	V
Input low voltage	V _{IL}		-0.3		0.3xV _{CC}	V
Output high voltage	V _{OH}		0.8xV _{CC}		V _{CC}	V
Output low voltage	V _{OL}		0		0.2xV _{CC}	V
Operating temperature	T _{opr}		-40		85	°C

NMEA 0183 Protocol

The NMEA protocol is an ASCII-based protocol, Records start with a \$ and with carriage return/line feed. GPS specific messages all start with \$GPxxx where xxx is a three-letter identifier of the message data that follows. NMEA messages have a checksum, which allows detection of corrupted data transfers.

The Gotop GT-2217-UB supports the following NMEA-0183 messages: GGA, GLL, GSA, GSV, RMC and VTG.

Table 1: NMEA-0183 Output Messages

NMEA Record	DESCRIPTION
GGA	Global positioning system fixed data
GLL	Geographic position—latitude/longitude

GSA	GNSS DOP and active satellites
GSV	GNSS satellites in view
RMC	Recommended minimum specific GNSS data
VTG	Course over ground and ground speed

GGA-Global Positioning System Fixed Data

Table 2 contains the values of the following example:

\$GPGGA, 161229.487,3723.24751,N, 12158.34160,W, 1,07,1.0,9.0,M.0000*18

Table 2: GGA Data Format

Name	Example	Units	Description
Message ID	\$GPGGA		GGA protocol header
UTC Position	161229.487		hhmmss.sss
Latitude	3723.24571		ddmm.mmmmm
N/S indicator	N		N=north or S=south
Longitude	12158.34160		ddmm.mmmmm
E/W Indicator	W		E=east or W=west
PositionFixIndicator	1		See Table 2-1
Satellites Used	07		Range 0 to 12
HDOP	1.0		Horizontal Dilution of Precision
MSL Altitude	9.0	meters	
Units	M	meters	
Geoids Separation		meters	

Units	M	meters	
Age of Diff.Corr.		second	Null fields when DGPS is not Used
Diff.Ref.Station ID	0000		
Checksum	*18		
<CR> <LF>			End of message termination

Table 2-1: Position Fix Indicators

Value	Description
0	Fix not available or invalid
1	GPS SPS Mode, fix valid
2	Differential GPS, SPS Mode, fix valid
3	GPS PPS Mode, fix valid

GLL-Geographic Position – Latitude/Longitude

Table 3 contains the values of the following example:

\$GPGLL , 3723.24755, N,12158.34161, W,161229.487, A*2C.

Table 3: GLL Data Format

Name	Example	Units	Description
Message ID	\$GPGLL		GLL protocol header
Latitude	3723.24755		Ddmm.mmmmm
N/S Indicator	N		N=north or S=south

Longitude	12158.34161		Ddmm.mmmmm
E/W Indicator	W		E=east or W=west
UTC Position	161229.487		Hhmmss.sss
Status	A		A=data valid or V=data not valid
Checksum	*2C		
<CR> <LF>			End of message termination

GSA-GNSS DOP and Active Satellites

Table 4 contains the values of the following example:

\$GPGSA , A, 3, 07, 02, 26,27, 09, 04,15, , , , , 1.8,1.0,1.5*33.

Table 4: GSA Data Format

Name	Example	Units	Description
Message	\$GPGSA		GSA protocol header
Mode 1	A		See Table 4-2
Mode 2	3		See Table 4-1
Satellite Used	07		Sv on Channel 1
Satellite Used	02		Sv on Channel 2
...
Satellite Used			Sv on Channel 12
PDOP	1.8		Position Dilution of Precision
HDOP	1.0		Horizontal Dilution of Precision
VDOP	1.5		Vertical Dilution of Precision

Checksum	*33		
<CR> <LF>			End of message termination

Table 4-1: Mode 1

Value	Description
1	Fix not available
2	2D
3	3D

Table 4-2: Mode 2

Value	Description
M	Manual-forced to operate in 2D or 3D mode
A	Automatic-allowed to automatically switch 2D/3D

GSV-GNSS Satellites in View

Table 5 contains the values of the following example:

\$GPGSV , 2, 1, 07, 07, 79,048, 42, 02, 51,062, 43, 26, 36,256, 42, 27, 27, 138,42*71

\$GPGSV, 2, 2, 07, 09, 23,313, 42, 04, 19, 159, 41, 15,12,041, 42*41.

Table 5: GGA Data Format

Name	Example	Units	Description
Message ID	\$GPGSV		GSV protocol header
Number of Message	2		Range 1 to 3
Message Number	1		Range 1 to 3
Satellites in View	07		

Satellite ID	07		Channel 1(Range 1 to 32)
Elevation	79	degrees	Channel 1(Maximum 90)
Azinmuth	048	degrees	Channel 1(True, Range 0 to 359)
SNR(C/NO)	42	dBHz	Range 0 to 99,null when not tracking
...			...
Satellite ID	27		Channel 4(Range 1 to 32)
Elevation	27	degrees	Channel 4(Maximum 90)
Azimuth	138	degrees	Channel 4(True, Range 0 to 359)
SNR(C/NO)	42	dBHz	Range 0 to 99, null when not tracking
Checksum	*71		
<CR> <LF>			End of message termination

Depending on the number of satellites tracked multiple messages of GSV data may be required.

RMC-Recommended Minimum Specific GNSS Data

Table 6 contains the values of the following example:

\$GPRMC, 161229.487, A, 3723.24751, N, 12158.34161, W, 0.13,309.62, 120598,, *10

Table 6: RMC Data Format

Name	Example	Units	Description
Message ID	\$GPRMC		RMC protocol header
UTS Position	161229.487		hhmmss.sss
Status	A		A=data valid or V=data not valid
Latitude	3723.24751		ddmm.mmmmm

N/S Indicator	N		N=north or S=south
Longitude	12158.34161		Ddmm.mmmmm
E/W Indicator	W		E=east or W=west
Speed Over Ground	0.13	Knots	
Course Over	309.62	Degrees	True
Ground			
Date	120598		Dummy
Magnetic variation		Degrees	E=east or W=west
Checksum	*10		
<CR> <LF>			End of message termination

VTG-Course Over Ground and Ground Speed

Table 7 contains the values of the following example:


\$GPVTG, 309.62, T, M, 0.13, N, 0.2, K*6E

Table 7: VTG Data Format

Name	Example	Units	Description
Message ID	\$GPVTG		VTG protocol header
Course	309.62	Degrees	Measured heading
Reference	T		True
Course		Degrees	Measured heading
Reference	M		Magnetic
Speed	0.13	Knots	Measured horizontal speed

Units	N		Knots
Speed	0.2	Km/hr	Measured horizontal speed
Units	K		Kilometer per hour
Checksum	*6E		
<CR> <LF>			End of message termination

Manufacturing Process Recommendations

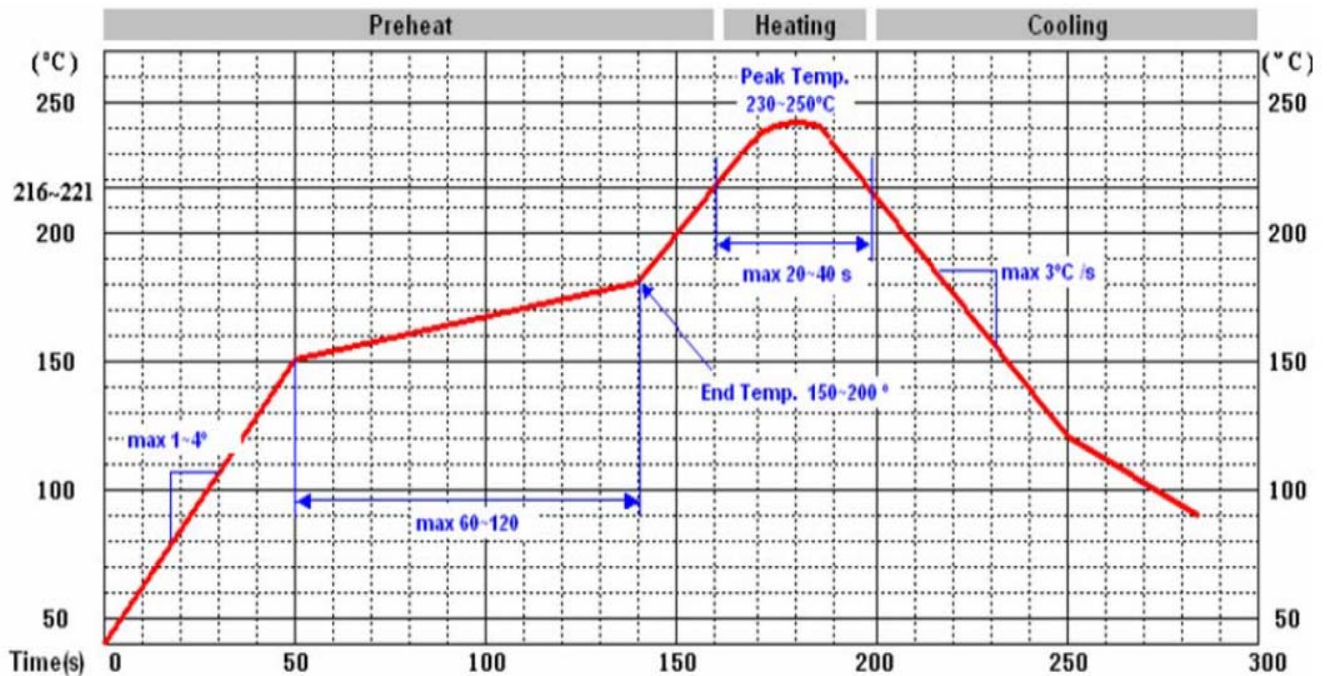

Note : The final soldering temperature chosen at the factory depends on additional external factors like choice of soldering paste, size, thickness and properties of the baseboard, etc. Exceeding the maximum soldering temperature in the recommended soldering profile may permanently damage the module.

©Copyright 2011 Gotop Technology Co., Ltd. All Right Reserved

The information contained herein is subject to change without notice.

Gotop Technology Co. , LTD

Add:Room 603 Zhantao Technology Building,Minzhi Road,Xinniu Communnity,Minzhi Street,Baoan District,ShenZhen City China.

Phone: 86-755-23804156

fax: 86-755-23804155

N 22° 32' 17", E 114° 07' 07"

<http://www.gotop-zzu.com>

Not to be reproduced in whole or part for any purpose without written permission of Gotop Technology Inc ('Gotop'). Information provided by Gotop is believed to be accurate and reliable. These materials are provided by Gotop as a service to its customers and may be used for informational purposes only. Gotop assumes no responsibility for errors or omissions in these materials, nor for its use. Gotop reserves the right to change specification at any time without notice.

These materials are provides 'as is' without warranty of any kind, either expressed or implied, relating to sale and/or use of Gotop products including liability or warranties relating to fitness for a particular purpose, consequential or incidental damages, merchantability, or infringement of any patent, copyright or other intellectual property right. Gotop further does not warrant the accuracy or completeness of the information, text, graphics or other items contained within these materials. Gotop shall not be liable for any special, indirect, incidental, or consequential damages, including without limitation, lost revenues or lost profits, which may result from the use of these materials. Gotop products are not intended for use in medical, life-support devices, or applications involving potential risk of death, personal injury, or severe property damage in case of failure of the product.